



HEADLAMP INSTALLATION *guide*

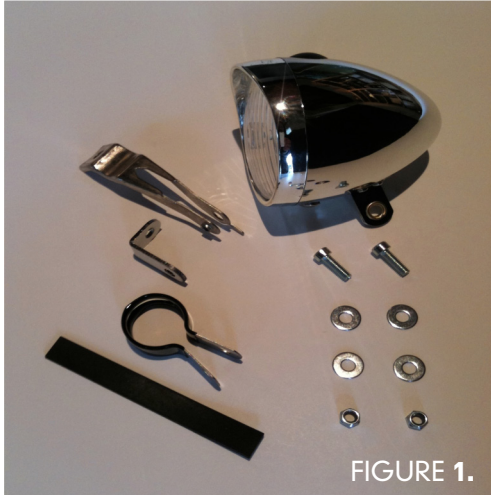


FIGURE 1.

HEADLAMP PARTS:

- *Headlamp*
- *Rubber coated clamp*
- *Matting*
- *Brake bolt bracket*
- *'L' Bracket*
- *M5 X 15mm bolt (Qty. 2)*
- *Washers (Qty. 4)*
- *4mm Locknuts (Qty. 2)*

[SEE FIGURE 1.]



FIGURE 2.

TOOLS NEEDED:

- *5mm Hex Wrench*
- *8mm Box Wrench*

[SEE FIGURE 2.]

BRAKE BOLT/FENDER BOLT MOUNT ABOVE THE FRONT WHEEL



FIGURE 3.



FIGURE 4.

Clamp the Headlamp into the Brake bolt bracket, between arms, using a Bolt and washer. Install the opposite square end of Brake bolt bracket between brake and fork.

[SEE FIGURES 3. & 4.]

HARDWARE NEEDED:

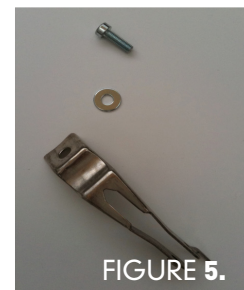


FIGURE 5.

HANDLEBAR MOUNT



FIGURE 6.



FIGURE 7.

Clamp Rubber coated clamp around the handlebar, use matting for tighter fit. Bolt the 'L' Bracket in the clamp with Bolt, 2 Washers, and Locknut. Clamp Headlamp to other end of 'L' Bracket using a Bolt, 2 Washers, & Locknut. 'L' Bracket is parallel to the handlebar to ensure the Headlamp is pointed forward.

[SEE FIGURES 6. & 7.]

HARDWARE NEEDED:



FIGURE 8.

FORK MOUNT



FIGURE 9.



FIGURE 10.

Clamp Rubber coated clamp around the front fork as high on the fork as possible. Bolt the 'L' Bracket in the clamp with a Bolt, 2 Washers, and Locknut. Clamp Headlamp to other end of 'L' Bracket using a Bolt, 2 Washers, & Locknut. Ensure Headlamp is pointed forward.

[SEE FIGURES 10. & 11.]

HARDWARE NEEDED:



FIGURE 11.